




Slim Line - Fluorescent Tube Keluar Sign

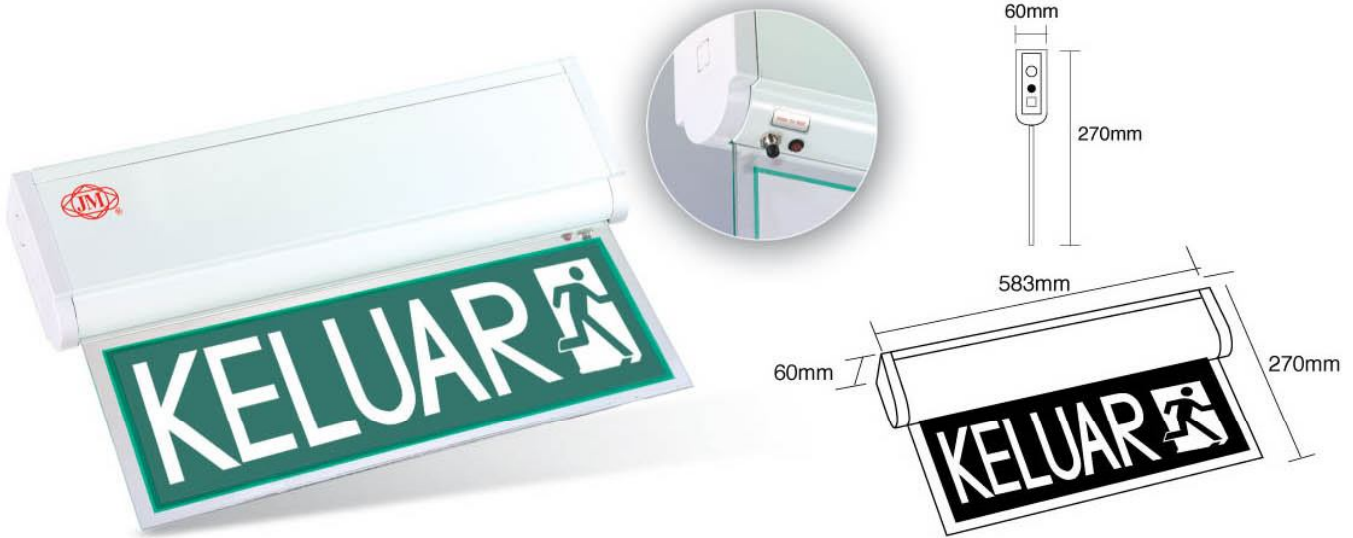

TR 218 F

| | | |
|------------------------------|---|--|
| Input Voltage | : | 230V +/- 10%, 50/60Hz |
| Mode of Operation | : | Sustained |
| Lamp Used | : | Fluorescent Tube 2 x 13 watt |
| Rated Duration | : | 3 hours |
| Power Consumption | : | 30 VA |
| Battery Type | : | Maintenance free high temperature Nickel Metal Hydride (Ni-MH) battery 10 x 1.3AH |
| Charger | : | Solid State Electronic Automatic |
| Charging Monitor | : | Red LED 5mm diameter |
| Test Facility | : | Micro Switch for independent testing |
| Operating Temperature | : | ta 40 °C |
| Safety Feature | : | Incoming AC fuse and Battery DC fuse |
| Fitting Construction | : | Aluminum casing finish in epoxy powder coating Using "clip-on" design for easy installation |
| Diffuser | : | Cast Acrylic Sheet |
| Product Dimension | : | Length 583 mm X Width 60 mm X Height 270 mm |
| Weight | : | 2.9kg |
| Mounting | : | Wall, ceiling or pendant mounting |
| Compliance | : | Malaysia Standards MS 983 |
| Warranty | : | 1 Year |

Other available designs



KELUAR (Single Sided)
TR 218F (KL)



KELUAR (Single Sided)
TR 218F (KR)



KELUAR (Double Sided)
TR 218F/D



KELUAR (R.MAN) (Double Sided)
TR 218F/D (KM)

Note: Due to continuous development and improvement, our company reserve the right to change specification without notice



Quality Assured By Full SIRIM Licence
in Malaysia since 1992

- Approved by Director General of Fire Service in Malaysia
- Approved by Standard & Industrial Research Institute of Malaysia (SIRIM)
- Approved by Chief Electrical Inspector of Malaysia
- Complies fully with uniform Building By-Law Regulations in Malaysia