




Slim Line - Fluorescent Tube Keluar Sign Recess

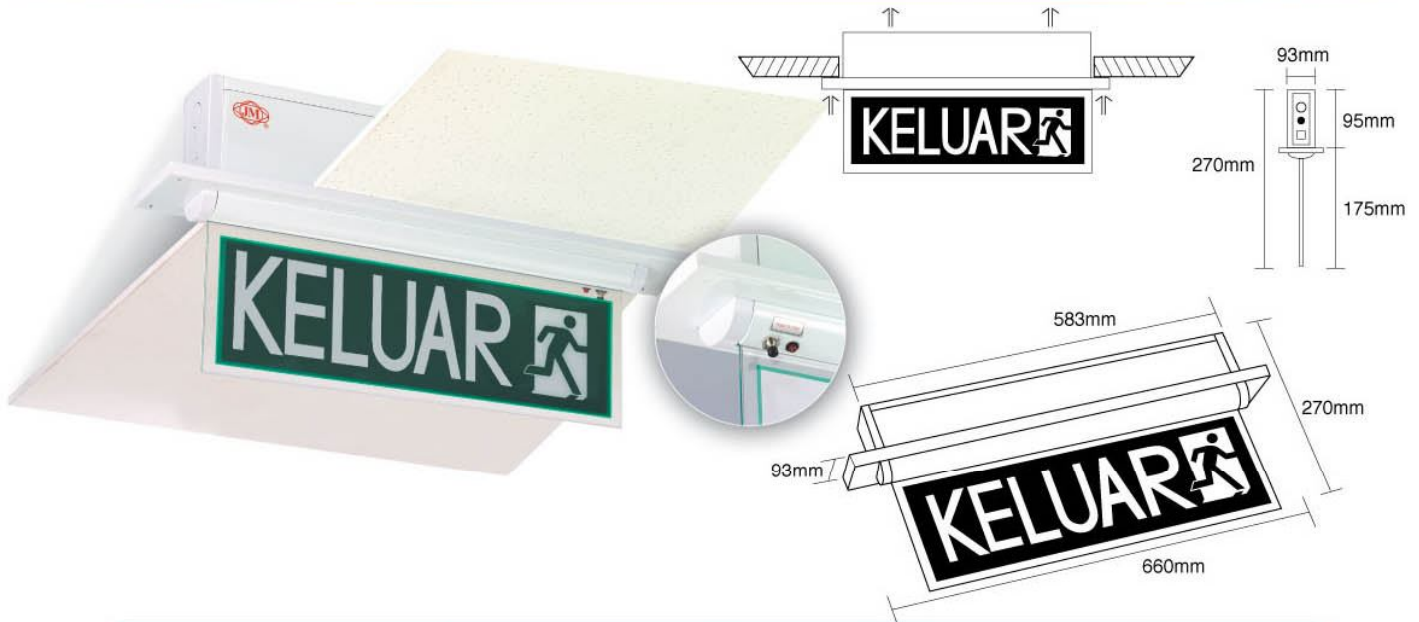

TR 218 F/R

Input Voltage	: 230V +/- 10%, 50/60Hz
Mode of Operation	: Sustained
Lamp Used	: Fluorescent Tube 2 x 13 watt
Rated Duration	: 3 hours
Power Consumption	: 30 VA
Battery Type	: Maintenance free high temperature Nickel Metal Hydride (Ni-MH) battery 10 x 1.3AH
Charger	: Solid State Electronic Automatic
Charging Monitor	: Red LED 5mm diameter
Test Facility	: Micro Switch for independent testing
Operating Temperature	: ta 40 °C
Safety Feature	: Incoming AC fuse and Battery DC fuse
Fitting Construction	: Aluminum casing finish in epoxy powder coating Using "clip-on" design for easy installation
Diffuser	: Cast Acrylic Sheet
Product Dimension	: Length 660 mm X Width 93 mm X Height 270 mm
Weight	: 3.0kg
Mounting	: Recess mount
Compliance	: Malaysia Standards MS 983
Warranty	: 1 Year

Other available designs



KELUAR (Single Sided)
TR 218F/R (KL)



KELUAR (Single Sided)
TR 218F/R (KR)



KELUAR (Double Sided)
TR 218F/RD



KELUAR (R.MAN) (Double Sided)
TR 218F/RD (KM)

Note : Due to continuous development and improvement, our company reserve the right to change specification without notice



Quality Assured By Full SIRIM Licence
in Malaysia since 1992

- Approved by Director General of Fire Service in Malaysia
- Approved by Standard & Industrial Research Institute of Malaysia (SIRIM)
- Approved by Chief Electrical Inspector of Malaysia
- Complies fully with uniform Building By-Law Regulations in Malaysia