




## Slim Line - LED Emergency Exit Light

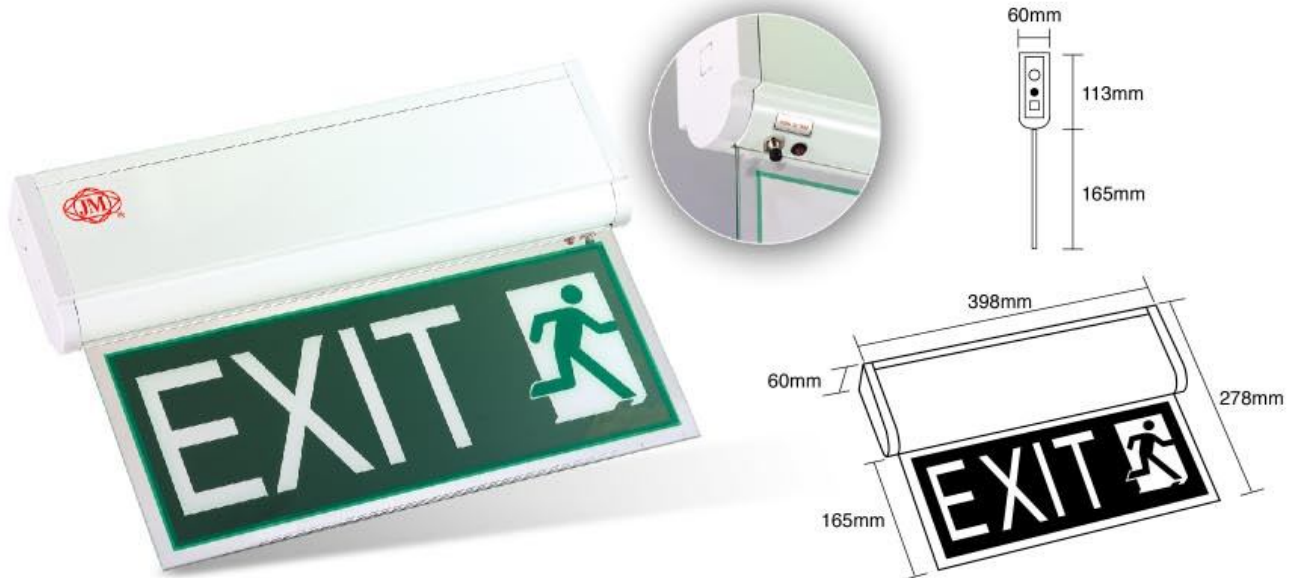

### TR 218L-E (Single side)

<b>Input Voltage</b>	: 230V +/- 10%, 50/60Hz
<b>Mode of Operation</b>	: Maintained
<b>Lamp Used</b>	: LED Super Bright High Quality 10 units
<b>Rated Duration</b>	: 3 hours
<b>Power Consumption</b>	: 6.9 VA
<b>Battery Type</b>	: Maintenance free high temperature Nickel Metal Hydride (Ni-MH) battery 3 x 1.2 AH
<b>Charger</b>	: Solid State Electronic Automatic
<b>Charging Monitor</b>	: Red LED 5mm diameter
<b>Test Facility</b>	: Micro Switch for independent testing
<b>Operating Temperature</b>	: ta 40 °C
<b>Safety Feature</b>	: Incoming AC fuse and Battery DC fuse
<b>Fitting Construction</b>	: Aluminum casing finish in epoxy powder coating Using "clip-on" design for easy installation
<b>Diffuser</b>	: Cast Acrylic Sheet
<b>Product Dimension</b>	: Length 398 X Width 60 X Height 278 mm
<b>Weight</b>	: 1.3kg
<b>Mounting</b>	: Wall, ceiling or pendant mounting
<b>Compliance</b>	: Malaysia Standards MS 983
<b>Warranty</b>	: 5 Years

#### Remarks :

Also available with double side signage.

Model : TR 218LD-E

Description : LED Emergency Exit Light - Double Side

*Note : Due to continuous development and improvement, our company reserve the right to change specification without notice*



Quality Assured By Full SIRIM Licence  
in Malaysia since 1992

- Approved by Director General of Fire Service in Malaysia
- Approved by Standard & Industrial Research Institute of Malaysia (SIRIM)
- Approved by Chief Electrical Inspector of Malaysia
- Complies fully with uniform Building By-Law Regulations in Malaysia