




Slim Line - LED Keluar Sign

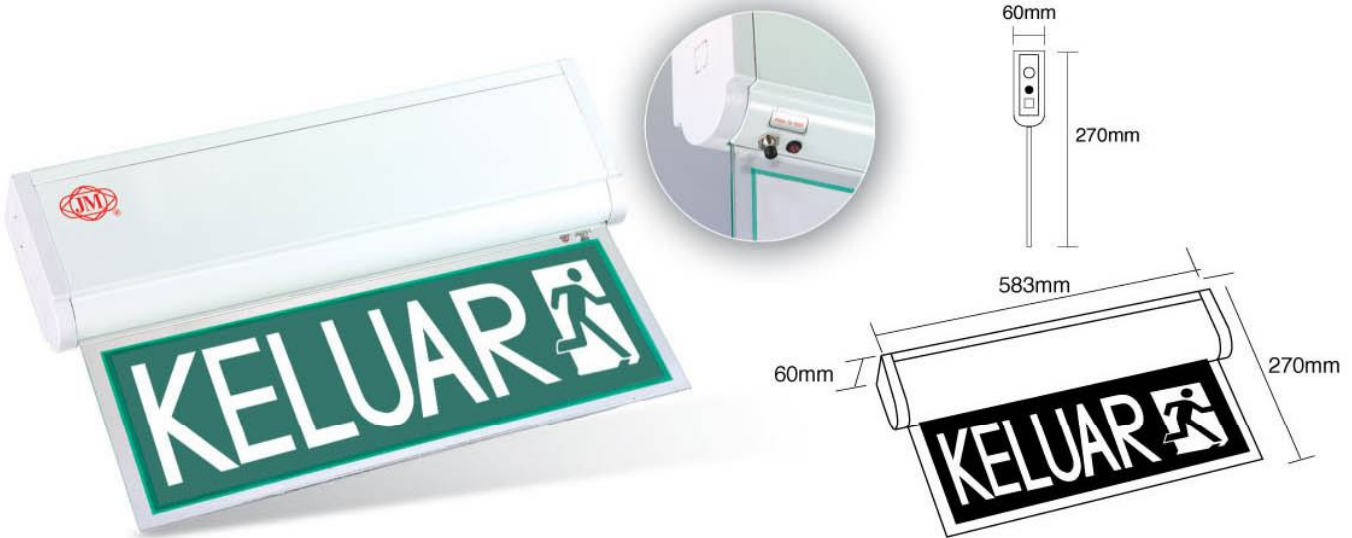

TR 218 L

Input Voltage	:	230V +/- 10%, 50/60Hz
Mode of Operation	:	Maintained
Lamp Used	:	12 units Super Bright LED 3.6Volts 0.35 Amps (Total)
Rated Duration	:	3 hours
Power Consumption	:	6.9 VA
Battery Type	:	Maintenance free high temperature Nickel Metal Hydride (Ni-MH) battery 3 x 1.3 AH
Charger	:	Solid State Electronic Automatic
Charging Monitor	:	Red LED 5mm diameter
Test Facility	:	Micro Switch for independent testing
Operating Temperature	:	ta 40 °C
Safety Feature	:	Incoming AC fuse and Battery DC fuse
Fitting Construction	:	Aluminum casing finish in epoxy powder coating Using "clip-on" design for easy installation
Diffuser	:	Cast Acrylic Sheet
Product Dimension	:	Length 583 mm X Width 60 mm X Height 270 mm
Weight	:	1.7kg
Mounting	:	Wall, ceiling or pendant mounting
Compliance	:	Malaysia Standards MS 983
Warranty	:	1 Year

Other available designs



KELUAR (Single Sided)
TR 218L (KL)



KELUAR (Single Sided)
TR 218L (KR)



KELUAR (Double Sided)
TR 218L/D



KELUAR (R.MAN) (Double Sided)
TR 218L/D (KM)

Note : Due to continuous development and improvement, our company reserve the right to change specification without notice



Quality Assured By Full SIRIM Licence
in Malaysia since 1992

- Approved by Director General of Fire Service in Malaysia
- Approved by Standard & Industrial Research Institute of Malaysia (SIRIM)
- Approved by Chief Electrical Inspector of Malaysia
- Complies fully with uniform Building By-Law Regulations in Malaysia