




## Recess Halogen Emergency Light

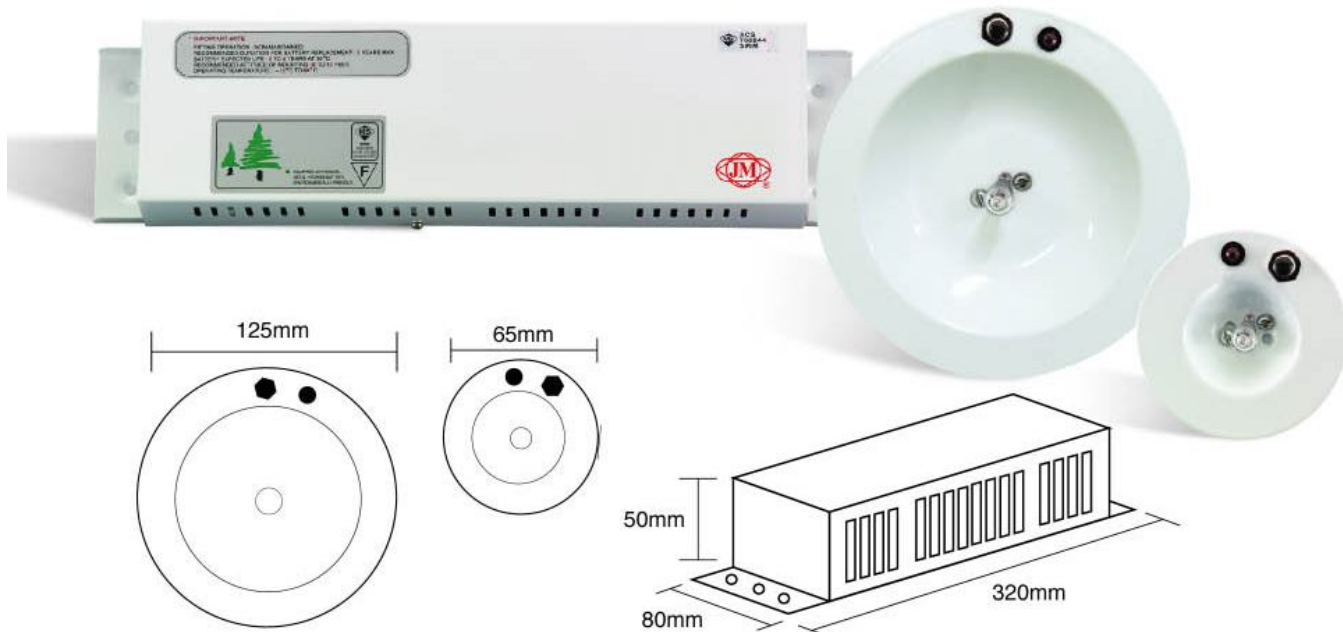

### TRE 110

<b>Input Voltage</b>	: 230V +/- 10%, 50/60Hz
<b>Mode of Operation</b>	: Non-maintained
<b>Lamp Used</b>	: 1 x 6 volt 10 watt Halogen bulb
<b>Rated Duration</b>	: 3 hours
<b>Battery Type</b>	: Maintenance free high temperature Nickel Metal Hydride (Ni-MH) battery 5 x 4.0 AH
<b>Charger</b>	: Solid State Electronic Automatic
<b>Charging Monitor</b>	: Red LED 5mm diameter
<b>Test Facility</b>	: Micro Switch for independent testing
<b>Operating Temperature</b>	: ta 40 °C
<b>Safety Feature</b>	: Battery DC fuse to prevent over-charging and over-discharging of the battery
<b>Fitting Construction</b>	: Electro galvanised steel sheet with epoxy powder coating
<b>Product Dimension</b>	: Power Pack : Length 320 X Width 80 X Height 50 mm Lamp Disc (S) : 65 mm diameter Lamp Disc (B) : 125 mm diameter
<b>Weight</b>	: 2kg (power pack)
<b>Mounting</b>	: Recess mounting
<b>Compliance</b>	: Malaysia Standards MS 619
<b>Warranty</b>	: 1 Year

Note : Due to continuous development and improvement, our company reserve the right to change specification without notice



Quality Assured By Full SIRIM Licence  
in Malaysia since 1992

- Approved by Director General of Fire Service in Malaysia
- Approved by Standard & Industrial Research Institute of Malaysia (SIRIM)
- Complies fully with uniform Building By-Law Regulations in Malaysia