




## Recess Emergency Light

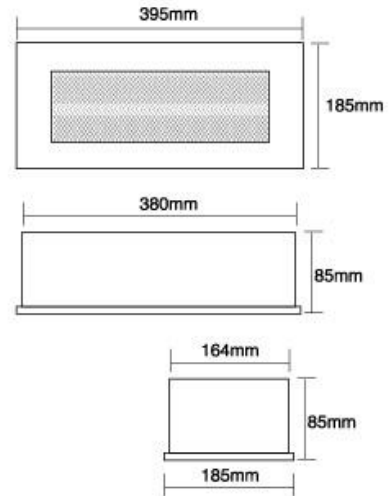

### TRE 203RC

<b>Output Brightness</b>	: 105 Lux
<b>Input Voltage</b>	: 230V +/- 10%, 50/60Hz
<b>Mode of Operation</b>	: Non-maintained
<b>Lamp Used</b>	: Fluorescent Tube 1 x 8 watt
<b>Rated Duration</b>	: 3 hours
<b>Power Consumption</b>	: 4.4 VA
<b>Battery Type</b>	: Maintenance free high temperature Nickel Metal Hydride (Ni-MH) battery 5 x 1.2 AH
<b>Charger</b>	: Solid State Electronic Automatic
<b>Charging Monitor</b>	: Red LED 5mm diameter
<b>Test Facility</b>	: Micro Switch for independent testing
<b>Operating Temperature</b>	: ta 40 °C
<b>Safety Feature</b>	: Low voltage cut-off to prevent over-discharge of the battery Incoming AC fuse and Battery DC fuse
<b>Fitting Construction</b>	: Electro galvanised steel sheet with epoxy powder coating
<b>Diffuser</b>	: Prismatic Diffuser
<b>Product Dimension</b>	: Length 395 X Width 185 X Height 85 mm
<b>Weight</b>	: 2kg
<b>Mounting</b>	: Recess mount
<b>Compliance</b>	: Malaysia Standards MS 619
<b>Warranty</b>	: 1 Year

Note: Due to continuous development and improvement, our company reserve the right to change specification without notice



Quality Assured By Full SIRIM Licence  
in Malaysia since 1992

- Approved by Director General of Fire Service in Malaysia
- Approved by Standard & Industrial Research Institute of Malaysia (SIRIM)
- Approved by Chief Electrical Inspector of Malaysia
- Complies fully with uniform Building By-Law Regulations in Malaysia